

KNC-PKS-FD322S-08 - Servo System

Kinco

FEATURES

- **88-126VAC Single-Phase Input Voltage**
- **Rated Torque of 338 oz-in**
- **Power Ratings up to 750 Watts**
- **2,500 PPR Incremental Encoder**
- **Maximum Speed of 3000 RPM**
- **IP65 for Body, IP54 Shaft Seal**
- **Brake Option Available**
- **Position, Speed, and Torque Control**
- **RS232 and RS485 Port**




DESCRIPTION

The KNC-PKS-FD322S-08-80S-AAK-AKH Servo System includes a 750 Watt SMH80S-0075 AC Servo Motor operated by the FD322S-LA-000 Drive. These packages are ideal and easy start-ups, convenience, and performance. The Servo Motors included in these packages provide torque up to 338 oz-in. The FD322S-LA-000 Drive offers current forward-feedback control, acceleration forward-feedback control, speed viewer, and inertia viewer; providing for improved response performance. Each system includes a 5m Motor Power Cable and a 5m Encoder Cable.

Item	Rated Voltage (VAC)	Rated Speed (RPM)	Rated Torque (NM)	Rated Current (Arms)	Inertia (oz-in-sec ²)	Torque Constant KT (oz-in/A)	Resistance (ohms)	Inductance (mH)	Brake (24VDC)	Motor Length (mm)	Shaft Diameter (mm)
KNC-PKS-FD322S-02-60S-AAK-AKH	88-126	3000	1.27	4	0.0067	46.87	1.7	3.5	No	150	14
KNC-PKS-FD322S-02-60S-ABK-AKH	88-126	3000	1.27	4	0.0067	46.87	1.7	3.5	Yes	190	14

ORDERING INFORMATION

PKS-FD322S-04-60S-AAK-AKH

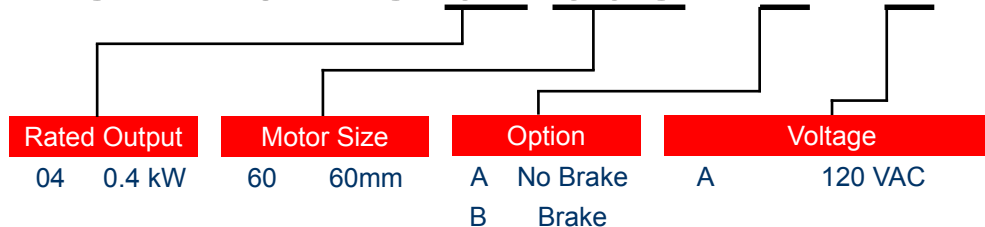

L011570

SMH80S-0075 Motor Specifications

Kinco

FEATURES


- 220 VAC
- 750 W Power Rating
- Rated Torque of 338 oz-in
- Maximum Speed of 3000 rpm
- 2500 PPR Incremental Encoder Attached
- IP65 for Body, IP54 Shaft Seal
- Brake Option Available
- CE Certified



SPECIFICATIONS

Item	Rated Torque (NM)	Rated Power (Watts)	Rated Speed (rpm)	Rated Current (Arms)	Inertia (oz-in-sec ²)	Torque Constant KT (oz-in/A)	Resistance (ohms)	Inductance (mH)	Length (mm)	Weight (lbs)
SMH80S-0075-30AAK-3AKH	2.39	750	3000	7.5	0.02002	46.87	0.41	1.95	167	7.27
SMH80S-0075-30ABK-3AKH	2.39	750	3000	7.5	0.02002	46.87	0.41	1.95	217	8.81

DIMENSIONS

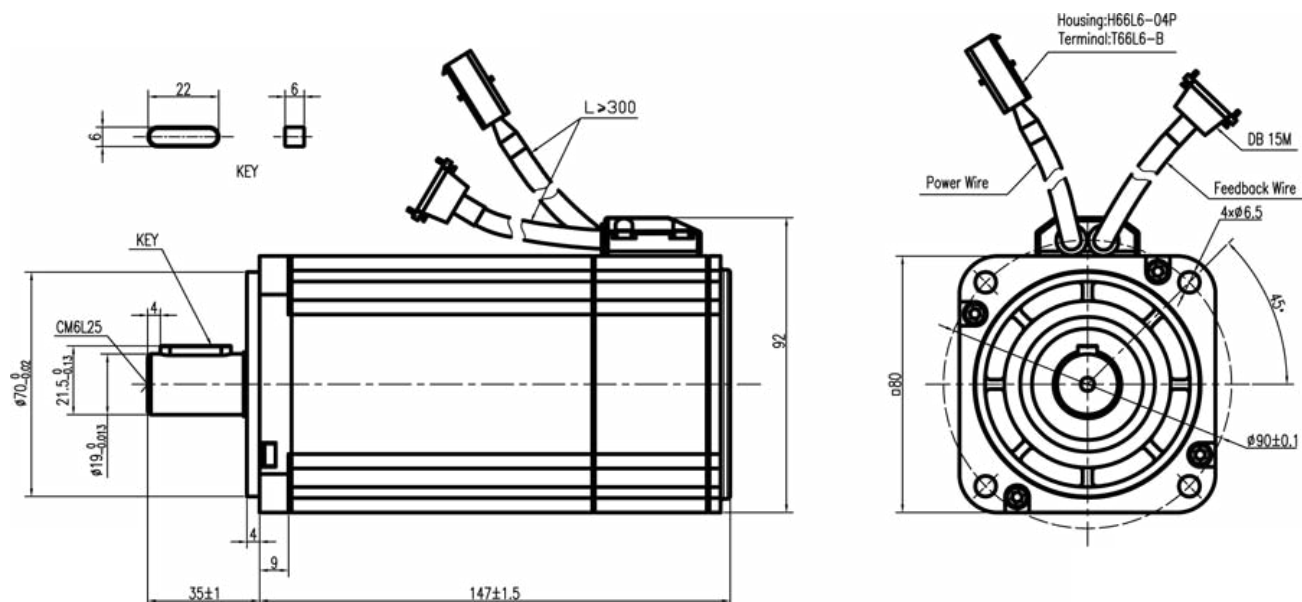

Note: Part Number SMH80S-0075-30ABK is with the brake option. Brake option not shown in above dimensions.

Dimensions are in mm

FD322S-LA-000 Driver Specifications


Kinco

FEATURES


- Input Voltage Range of 88-126VAC
- 400 W Power Rating
- Rated Torque of 180 oz-in
- Maximum Speed of 3000 rpm
- 2500 PPR Incremental Encoder Attached
- IP65 for Body, IP54 Shaft Seal
- Brake Option Available
- Position, Speed, and Torque Control
- CE Certified



DIMENSIONS

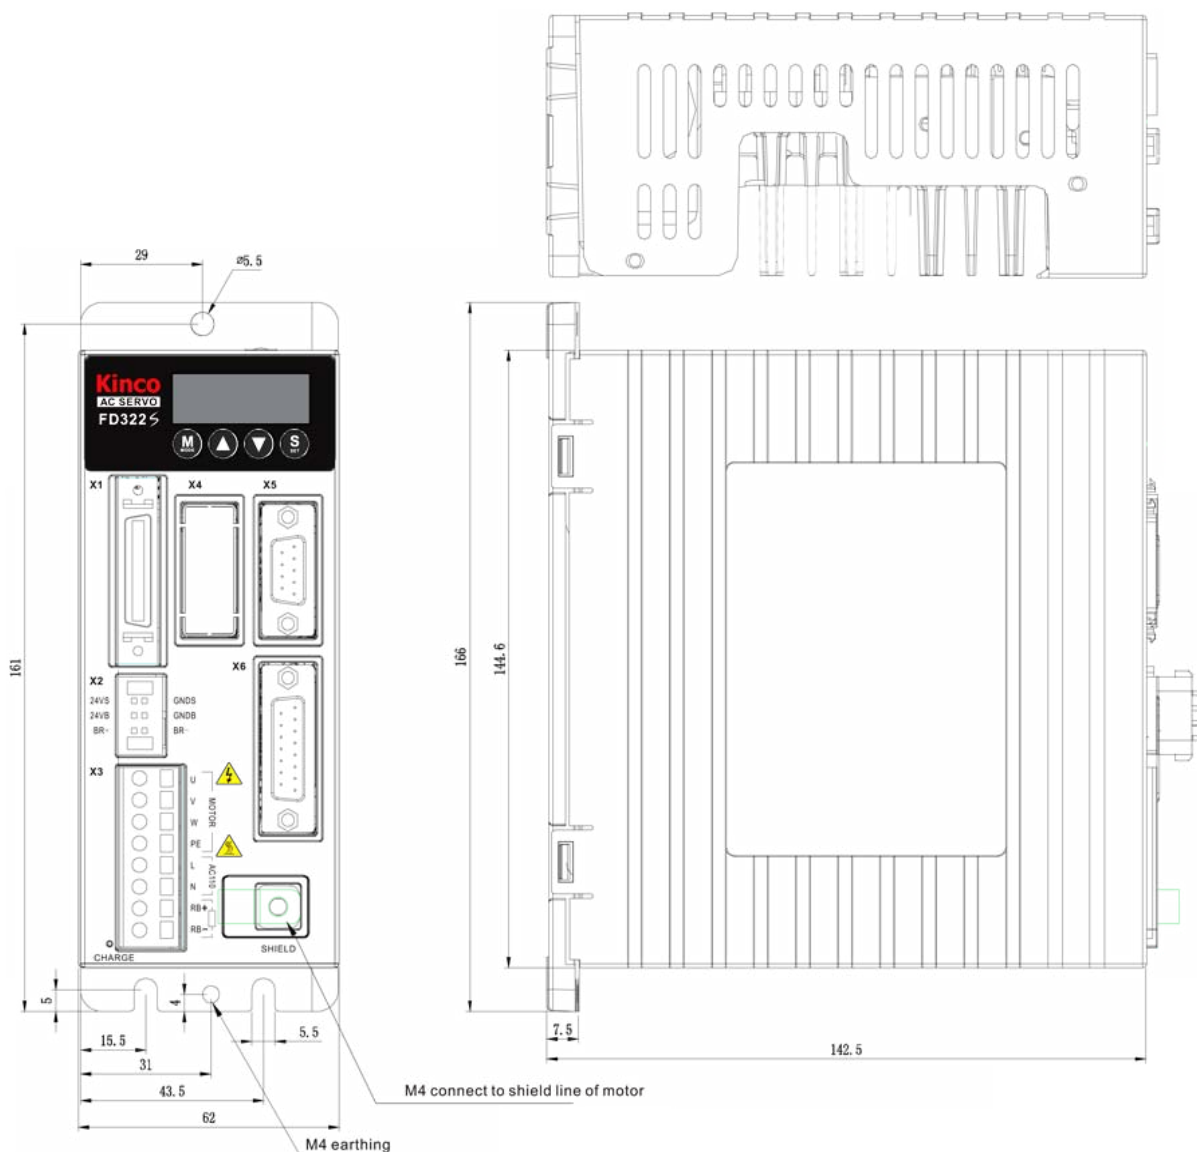


Dimensions are in mm

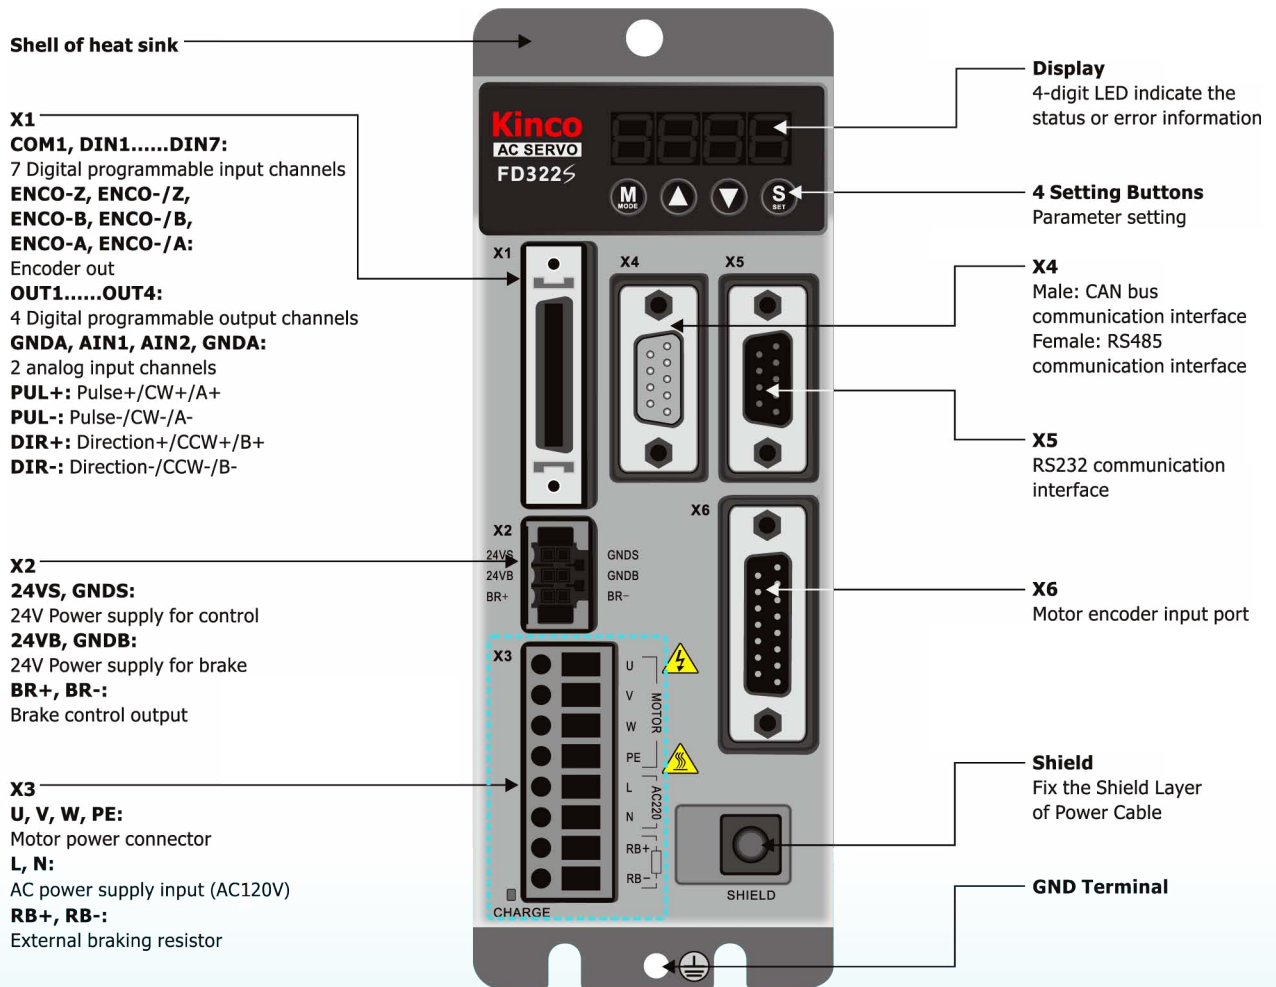

Digital Input/Output Port

PIN No.	Signal	PIN No.	Signal	PIN No.	Signal	PIN No.	Signal
2	COM1	1	OUT1+	20	NC	19	AIN1
4	DIN1	3	OUT1-	22	NC	21	GNDA
6	DIN2	5	OUT2+	24	GND	23	AIN2
8	DIN3	7	OUT2-	26	ENCO-Z	25	GNDA
10	DIN4	9	OUT3	28	ENCO-/Z	27	PUL+
12	DIN5	11	OUT4	30	ENCO-B	29	PUL-
14	DIN6	13	COM0	32	ENCO-/B	31	DIR+
16	DIN7	15	NC	34	ENCO-A	33	DIR-
18	NC	17	NC	36	ENCO-/A	35	NC

X1

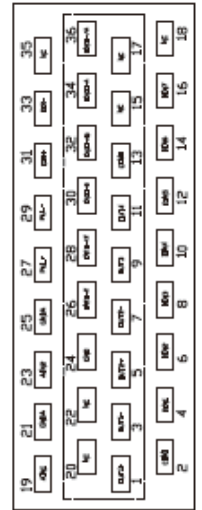


CAN

PIN Number	Signal
1	NC
2	CAN_L
3	GND
4	NC
5	NC
6	NC
7	CAN_H
8	NC
9	NC

RS485

PIN Number	Signal
1	NC
2	RX+
3	TX+
4	NC
5	GND
6	+5V
7	RX-
8	TX-
9	NC

X4




9 pin DB

RS232

PIN Number	Signal
1	NC
2	TX
3	RX
4	NC
5	GND
6	NC
7	NC
8	NC
9	NC

X5




9 pin DB female

ENCODER IN

PIN No.	Signal	PIN No.	Signal
1	+5V	9	GND
2	A	10	/A
3	B	11	/B
4	Z	12	/Z
5	U	13	/U
6	V	14	/V
7	W	15	/W
8	PTC_IN		

Motor Encoder Input Port

X6



15 pin DB female

Compatible Drivers

Part Number	Description
FD322S-LA-000	Servo Driver



Compatible Motors

Part Number	Description
SMH80S-0075-30AAK-3AKH	Servo Motor
SMH80S-0075-30ABK-3AKH	Servo Motor



Compatible Cables

Part Number	Description
KNC-SRV-ENCCA-05-KH	Encoder Cable
KNC-SRV-MOT-005-05-KL	Power Cable

