

FD123-LA-000 Series Servo Driver

FEATURES

- **Input Voltage Range From DC24VDC to 70VDC**
- **Rated Current is (RMS) 10A**
- **50-200 Watt Power Range**
- **Position, Speed, and Torque Control**
- **RS232 and RS485**
- **Natural Air Cooling**
- **MODBUS and CANopen Standard**
- **Requires 2500PPR Encoder Input**
- **Communication Software**
 - **Configure Parameters**
 - **I/O Signal Monitoring**
 - **Speed and Position Curves**
 - **Gain Adjustments**
- **Programmable Inputs and Outputs**
 - **4 Inputs**
 - **2 Outputs**
- **CE Certified**



DESCRIPTION

The FD123-LA-000 Series Servo Drive is a great fit for applications requiring position, speed, and/or torque control methods. The uniqueness of this Servo Drive package is the flexibility of using a single Servo Drive that can accommodate motors with power ratings ranging from 50-200W. Also, it is designed to switch dynamically among different control methods for more flexible operation. The FD123-LA-000 Servo Drive can operate position control mode either with pulse and direction inputs, 8 internal position points, or 8 internal speed points. The FD123-LA-000 Servo Drive operates with a 24-70VDC input. These drives come standard with an RS232 which can be operated using MODBUS Protocol, and RS485, or can be operated using our Free, Easy-to-Use Software. Please consult our Application Engineers for more information.

SPECIFICATIONS





Category	Servo Driver	Servo Motor	Description	Power/Brake Cable	Encoder Cable	Rated Power / Rated Speed / Rated Torque
Small Inertia DC48V	FD123-CA-000 FD123-EA-000 FD123-LA-000 FD123-CC-000	SMH40S-0005-30AAK-4DKH	2500PPR Incremental Encoder	MOT-005-05-KL-D	ENCCA-05-KH	50W / 3000 RPM / 22.6 oz-in
		SMH40S-0010-30AAK-4DKH	2500PPR Incremental Encoder	MOT-005-05-KL-D		100W / 3000 RPM / 45.3 oz-in
		SMC60S-0020-30AAK-3DKH	2500PPR Incremental Encoder	MOT-005-05-KL-D		200W / 3000 RPM / 90.6 oz-in
		SMC60S-0020-30ABK-3DKH	2500PPR Incremental Encoder, with Brake	MOT-005-05-KL-D BRA-05-KL		200W / 3000 RPM / 90.6 oz-in
		SMC60S-0040-30AAK-3DKH	2500PPR Incremental Encoder	MOT-005-05-KL-D		400W / 3000 RPM / 179.8 oz-in
		SMC60S-0040-30ABK-3DKH	2500PPR Incremental Encoder, with Brake	MOT-005-05-KL-D BRA-05-KL		400W / 3000 RPM / 179.8 oz-in
		SMC80S-0040-30AAK-3DKH	2500PPR Incremental Encoder	MOT-005-05-KL-D		400W / 3000 RPM / 179.8 oz-in
		SMC80S-0040-30ABK-3DKH	2500PPR Incremental Encoder, with Brake	MOT-005-05-KL-D BRA-05-KL		400W / 3000 RPM / 179.8 oz-in

L011713

FD123-LA-000 Series Servo Driver

Kinco

DIMENSIONS

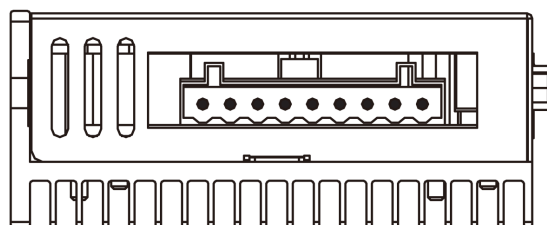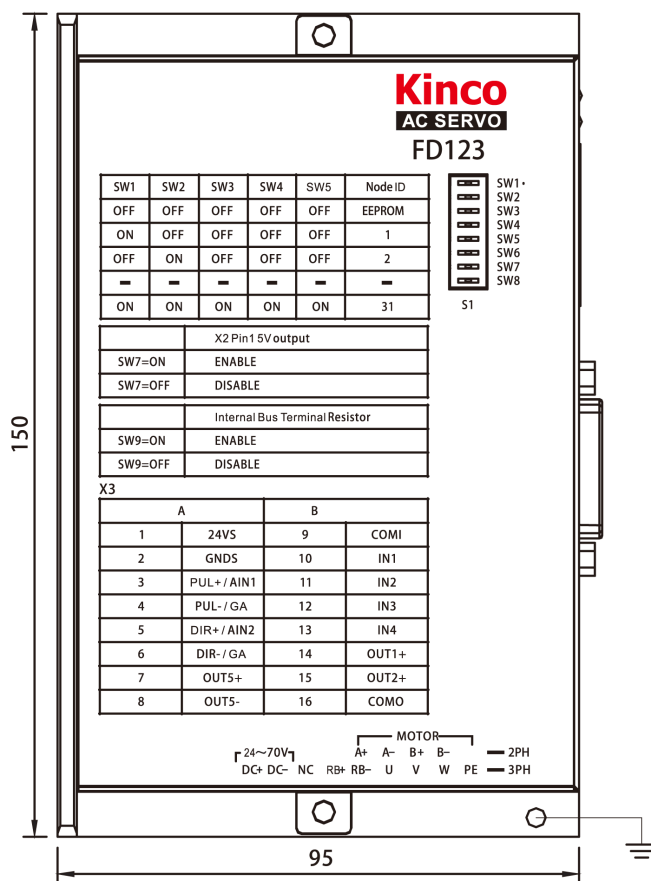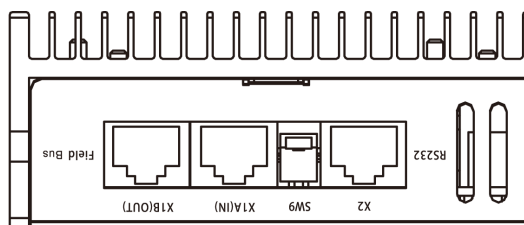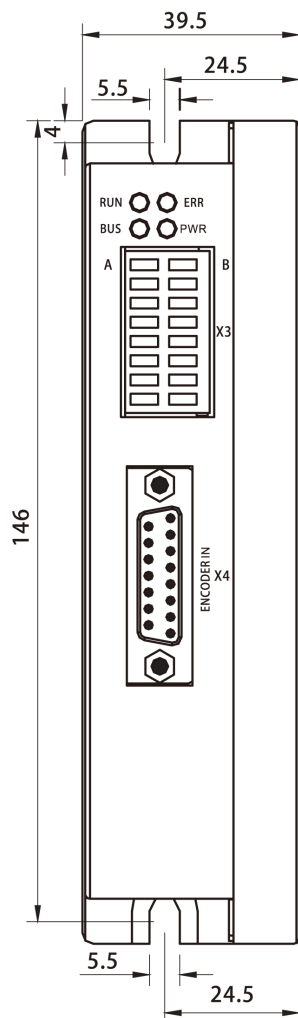

Note: All Dimensions in (mm)

FD123-LA-000 Series Servo Driver

Kinco

TECHNICAL SPECIFICATIONS


Model Parameter		FD123-LA-000 Series
Power	Main Supply Voltage	24VDC-70VDC
	Control Circuit Voltage	DC24V 1A (Optional)
Current	Rated Current (RMS)	10A
	Peak Current (PEAK)	45A
Feedback Signal		2500PPR Incremental Encoder
Brake Chopper		Via Wiring an External Braking Resistor (Mainly in Quick Start and Stop Application)
Brake Chopper Threshold		DC73V $\pm$ 2V (Default Value, Adjustable via Software)
Over-Voltage Alarming Threshold		DC86V $\pm$ 2V
Under-Voltage Alarming Threshold		18V $\pm$ 2V
Cooling Method		Natural Air Cooling
Weight		0.565 Kg
Digital Input	Input Specification	4 Digital Inputs, with COMI Terminal for PNP (High Level Valid 12.5-30V) or NPN (Low Level Valid 0-5V) Connection.
	Input Function	Define Freely According to Requirement, Supporting Following Functions: Driver Enable, Driver Fault Reset, Driver Mode Control, Proportional Control, Positive Limit, Negative Limit, Homing Signal, Reverse Command, Internal Speed Section Control, Internal Positive Section Control, Quick Stop, Start Homing, Active Command, Switch Electronic Gear Ratio, Switch Gain.
Digital Output	Output Specification	3 Digital Outputs: OUT1, OUT2 Current is 100mA; The Output Current of Brake Control Output Port (OUT5+/OUT5-) is 500mA, Can Drive Brake Device Directly.
	Output Function	Define Freely According to Requirement, Supporting Following Functions: Driver Ready, Driver Fault, Position Reached, Motor at Zero Speed, Motor Brake, Motor Speed Reached, Z Signal, Maximum Speed Obtained in Torque Mode, Motor Brake, Position Limiting, Reference Found.
	RS232	The Max. Baudrate is 115.2KHz, Use Kinco Software to Communicate with PC, or Via Free Protocol to Communicate with Controller.
	Protection Function	Over-Voltage Protection, Under-Voltage Protection, Motor Over-Heat Protection (I^2T), Short-Circuit Protection, Drive Over-Heat Protection, Etc.
RS485		The Max. Baudrate is 115.2KHz, use Modbus RTU Protocol to Communicate with Controller.
Operation Environment	Operating Temperature	0 $\sim$ 40°C
	Storage Temperature	-10°C~70°C
	Humidity (Non-Condensing)	Below 90%RH
	Protection Class	IP20
	Installation Environment	Installed in a Dust-Free, Dry and Lockable Environment (Such as in a Electrical Cabinet)
	Installation Mode	Vertical Installation
	Altitude	No Power Limitation Below 1000m
	Atmospheric Pressure	86kpa-106kpa

RS485

PIN Number	Signal
1	RX
2	/RX
3	GND
4	/TX
5	TX
6	NC
7	NC
8	GND

RS485
Communication
Port

X1




RS232

PIN Number	Signal
3	TXD
4	GND
6	RXD
Others	NC

RS232 Communication
Interface, Can be Used for
Debugging and Import/
Export Project Data Via PC


X2



PIN No.	Signal	PIN No.	Signal
1	+24V	9	COM1
2	GNDS	10	DIN1
3	PUL+	11	DIN2
4	PUL-	12	DIN3
5	DIR+	13	DIN4
6	DIR-	14	OUT1+
7	OUT5+	15	OUT2+
8	OUT5-	16	COMO

Digital Input/Output
Terminals

X3




ENCODER IN

PIN No.	Signal	PIN No.	Signal
1	+5V	9	GND
2	A	10	/A
3	B	11	/B
4	Z	12	/Z
5	U	13	/U
6	V	14	/V
7	W	15	/W
8	PTC_IN		

Motor Encoder Input
Interface

X4



Motor/Power Supply

PIN Name	PIN Function
DC+	Positive terminal of DC power supply and braking resistor
DC-	Negative terminal of DC power supply and 24VDC power supply
NC	No function
RB-	Negative terminal of braking resistor
RB+	Positive terminal of braking resistor
U	U phase of motor output, A- phase of motor output
V	V phase of motor output, B+ phase of motor output
W	W phase of motor output, B- phase of motor output
PE	Motor earthing

